
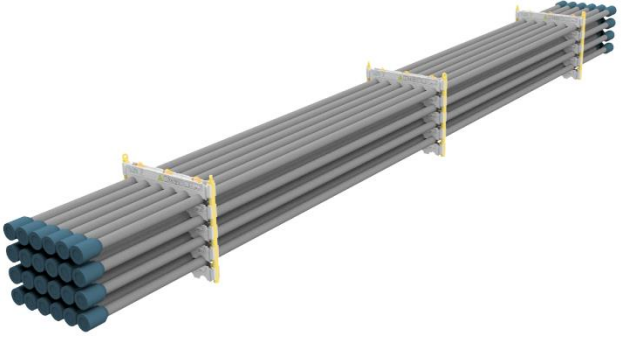


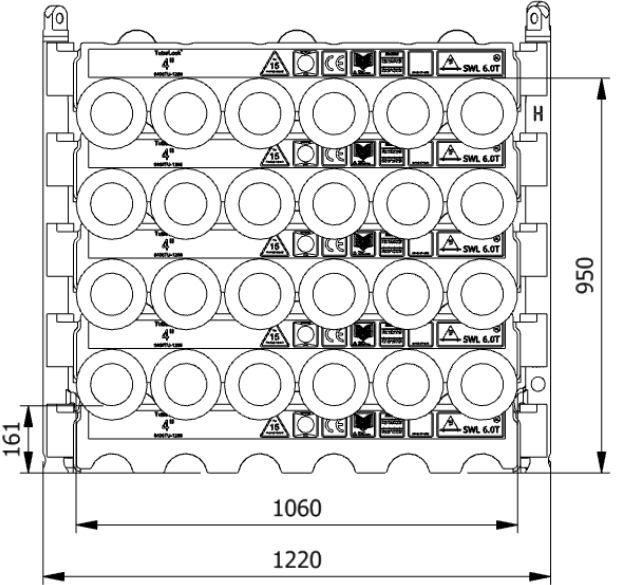

| <h2 style="margin: 0;">Datasheet</h2> <h3 style="margin: 0;">0400TU-1200-4-H</h3> | |
|--|-------------|
| SWL | 7.3 t |
| Pipe OD | 4" |
| Maximum weight per pipe | 292kg |
| Pipe capacity per system | 24 |
| M20 Bolt length | 190mm |
| Lifting pole | LP - H |
| H-Profile | 0400TU-1200 |
| TL weight per system | 296 kg |
| <p>CODES AND STANDARDS</p> <ul style="list-style-type: none"> • DNVGL-ST-0378 • NORSOK R-002 • LOLER 1998 Lifting operation and lifting equipment regulations • ILO Conversation No. 152 • CE declaration of conformity • Machinery Directive: MD2006/42/EC | |
| <p>TEST</p> <ul style="list-style-type: none"> • Load Test 2X SWL on 20% per batch • NDT 100% of Primary per batch before and after test • 5 yearly load test | |
|  | |
|  | |
| <p>H-Profile</p>  | |
| <p>Lifting Pole</p>  | |


Stacking

| Sketch | Systems Stacked | Height (mm) | Joints | Supported | Truck | Boat | Rig | Yard |
|--------|-----------------|-------------|--------|-----------|-------|------|-----|------|
| A | 1 | 950 | 24 | | x | x | x | x |
| B | 2 | 1810 | 48 | | x | x | x | x |
| C | 3 | 2680 | 72 | | | | x | x |
| D | 4 | 3550 | 96 | | | | x | x |

All sketch dimensions in mm


(x): Depending on Truck set-up and regulation

**SINGLE SYSTEM
(24 JOINTS)**



A


**2 SYSTEMS STACKED
(48 JOINTS)**




B

**4 SYSTEMS STACKED
(96 JOINTS)**

**3 SYSTEMS STACKED
(72 JOINTS)**

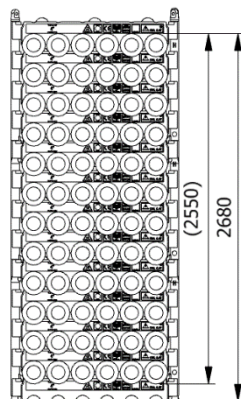


C

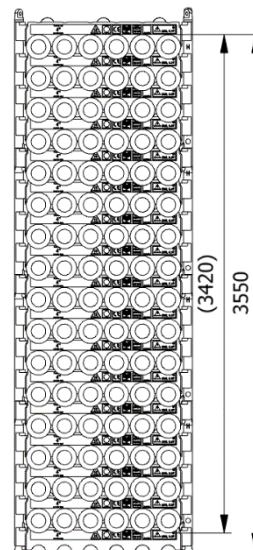

D

Spacing

| Status | w (width) n (number of rows) | S_w (system width) | k (constant) | y (info) | p (info) | T_w (total width) | f (constant) |
|-----------------------|-------------------------------------|----------------------|----------------|------------|------------|---------------------|----------------|
| Storages | $w = S_w + k \cdot (n - 1)$ | 990 | 1100 | 0 | 110 | $T_w = w + 2f$ | 110 |
| Running on rig | $w = S_w + k \cdot (n - 1)$ | 990 | 1140 | 40 | 150 | $T_w = w + 2f$ | 110 |

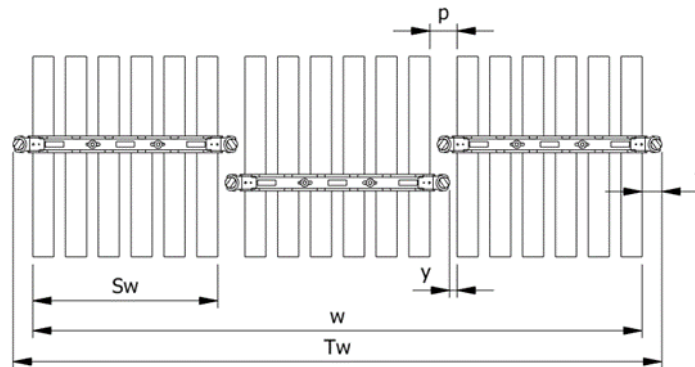

Example: Top view of Systems

Example:
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 990 + 1100 \cdot (3 - 1) = 3190 \text{ mm}$$


$$T_w = w + 2f = 3190 + 2 \cdot 110 = 3410 \text{ mm}$$

The width “ w ” for spacing of systems is 3190mm from the first pipe to the last and the total width “ T_w ” is 3410mm between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a single H-profile.

The footprint is shared between the lowest H-profiles based on the number of frames and the number systems stacked



Example: Footprint Surface Area

Maximum Footprint Table (based on 7.3mT SWL)

| System Stacked | 2 frames | 3 frames | 4 frames |
|----------------|--------------------------|-------------------------|-------------------------|
| 1 | 298,4 kN/m ² | 202,5 kN/m ² | 170,5 kN/m ² |
| 2 | 596,8 kN/m ² | 405 kN/m ² | 341 kN/m ² |
| 3 | 895,2 kN/m ² | 607,4 kN/m ² | 511,5 kN/m ² |
| 4 | 1193,6 kN/m ² | 809,9 kN/m ² | 682 kN/m ² |