
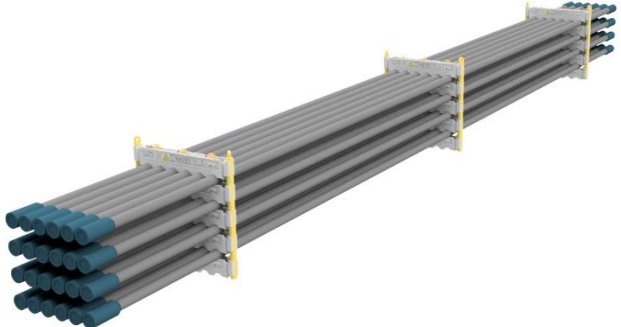


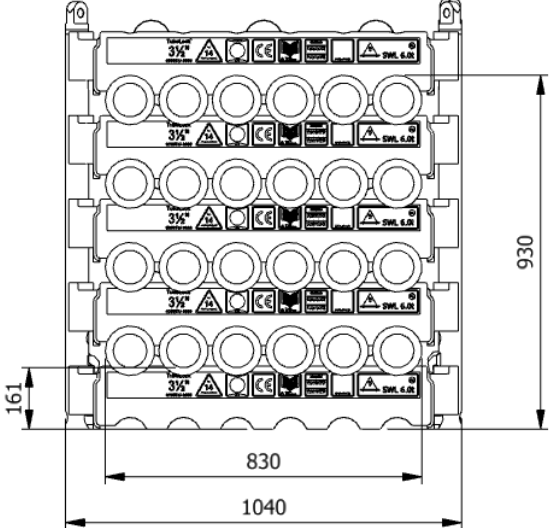

<h2>Data sheet</h2> <h3>0350TU-1000-4-H</h3>		
SWL	7.3 t	
Pipe OD	3-1/2"	
Maximum weight per pipe	293kg	
Pipe capacity per system	24	
M20 Bolt length	190mm	
Lifting pole	LP - H	
H-Profile	0350TU-1000	
TL weight per system	275 kg	
<p><b>CODES AND STANDARDS</b></p> <ul style="list-style-type: none"> <li>• DNVGL-ST-0378</li> <li>• NORSOK R-002</li> <li>• LOLER 1998 Lifting operation and lifting equipment regulations</li> <li>• ILO Conversation No. 152</li> <li>• CE declaration of conformity</li> <li>• Machinery Directive: MD2006/42/EC</li> </ul>		
<p><b>TEST</b></p> <ul style="list-style-type: none"> <li>• Load Test 2X SWL on 20% per batch</li> <li>• NDT 100% of Primary per batch before and after test</li> <li>• 5 yearly load test</li> </ul>		
<p><b>H-Profile</b></p> 		<p><b>Lifting Pole</b></p> 


## Stacking

Sketch	Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
A	1	930	24		X	X	X	X
B	2	1800	48		X	X	X	X
C	3	2680	72	X			X	X
D	4	3550	96	X			X	X

(x): Depending on Truck set-up and regulation


All sketch dimensions in mm

**SINGLE SYSTEM  
(24 JOINTS)**




A

**2 SYSTEMS STACKED  
(48 JOINTS)**

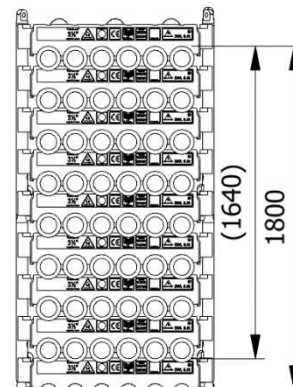


B

**3 SYSTEMS STACKED  
(72 JOINTS)**

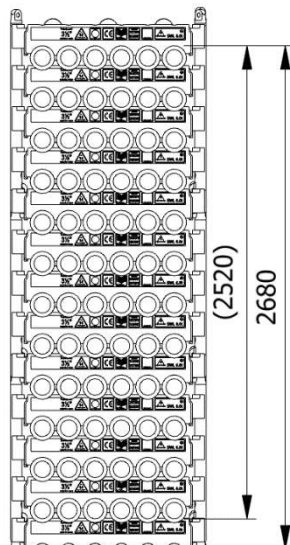


C

**4 SYSTEMS STACKED  
(96 JOINTS)**

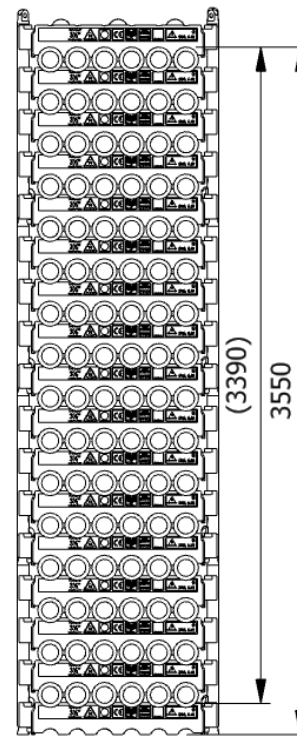

D

Spacing							
Status	$w$ (width) $n$ (number of rows)	$S_w$ (system width)	$k$ (constant)	$y$ (info)	$p$ (info)	$T_w$ (total width)	$f$ (constant)
Storages	$w = S_w + k \cdot (n - 1)$	790	915	0	125	$T_w = w + 2f$	125
Running on rig	$w = S_w + k \cdot (n - 1)$	790	955	40	165	$T_w = w + 2f$	125

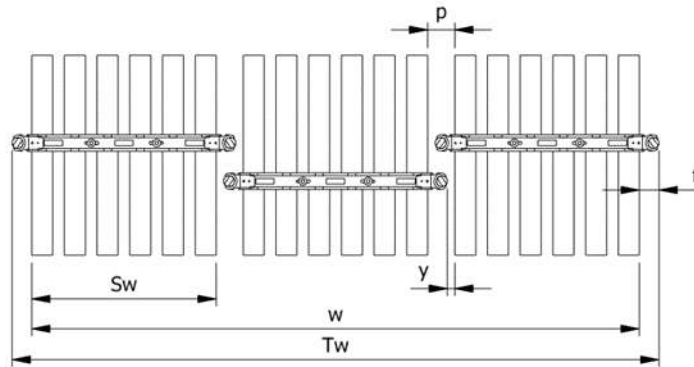

Topview of systems

Example:  
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 790 + 915 \cdot (3 - 1) = 2620\text{mm}$$


$$T_w = w + 2f = 2620 + 2 \cdot 125 = 2870\text{mm}$$

The width “w” for spacing of systems is 2620mm from the first pipe to the last and the total width “ $T_w$ ” is 2870mm between the 2 outer most Lifting Poles.

## Footprint

The figure below shows the footprint surface area of a singel H-profile.

The footprint is shared between the lowest H-profiles based on the number of frames and the number systems stacked

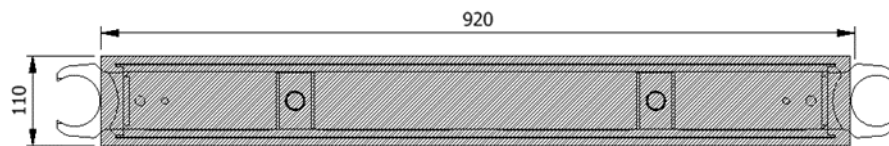

Example: Footprint Surface Area

### Maximum Footprint Table (based on 7.3mT SWL)

System Stacked	2 frames	3 frames	4 frames
1	354,2 kN/m <sup>2</sup>	240,3 kN/m <sup>2</sup>	202,4 kN/m <sup>2</sup>
2	708,4 kN/m <sup>2</sup>	480,7 kN/m <sup>2</sup>	404,8 kN/m <sup>2</sup>
3	1062,5 kN/m <sup>2</sup>	721 kN/m <sup>2</sup>	607,1 kN/m <sup>2</sup>
4	1416,7 kN/m <sup>2</sup>	961,4 kN/m <sup>2</sup>	809,6 kN/m <sup>2</sup>