






<h2 style="margin: 0;">Datasheet</h2> <h2 style="margin: 0;">0658TU-1200-3-H</h2>	
SWL	7.3 t
Pipe OD	6-5/8"
Maximum weight per pipe	476kg
Pipe capacity per system	15
M20 Bolt length	260mm
Lifting pole	LP - H
H-Profile	0658TU-1200
TL weight per system	155 kg
<p>CODES AND STANDARDS</p> <ul style="list-style-type: none"> • DNVGL-ST-0378 • NORSOK R-002 • LOLER 1998 Lifting operation and lifting equipment regulations • ILO Conversation No. 152 • CE declaration of conformity • Machinery Directive: MD2006/42/EC 	
<p>TEST</p> <ul style="list-style-type: none"> • Load Test 2X SWL on 5% per batch • NDT 100% of Primary per batch before and after test 	
<p>H-Profile</p> 	<p>Lifting Pole</p> 
	
	

Stacking


Layer	Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	1	940	15		X	X	X	X
2	2	1770	30		X	X	X	X
3	3	2620	45	X			X	X
4	4	3470	60	X			X	X

(x): Depending on Truck set-up and regulation

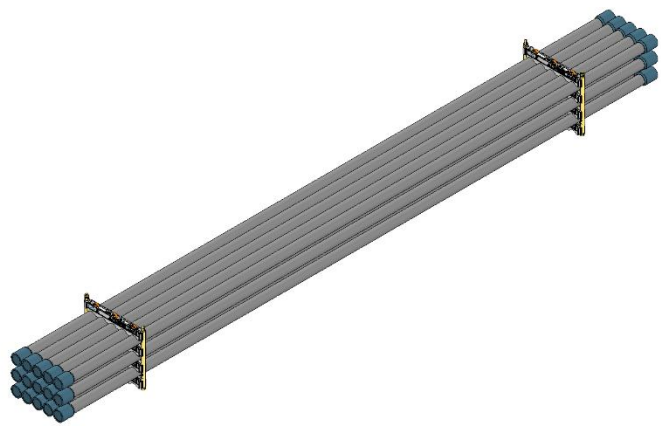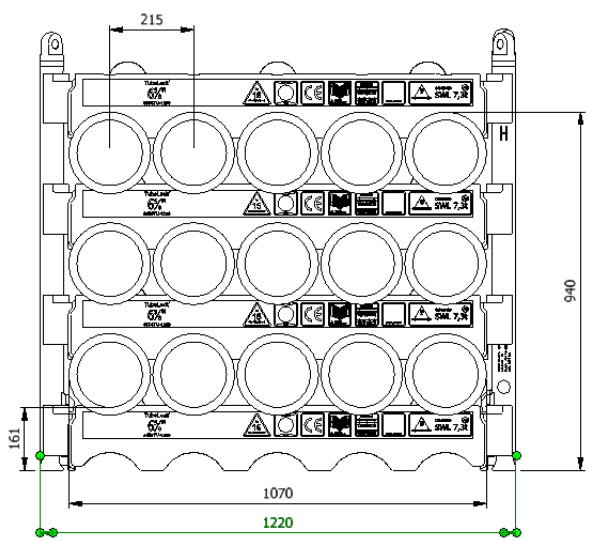All sketch dimensions in mm

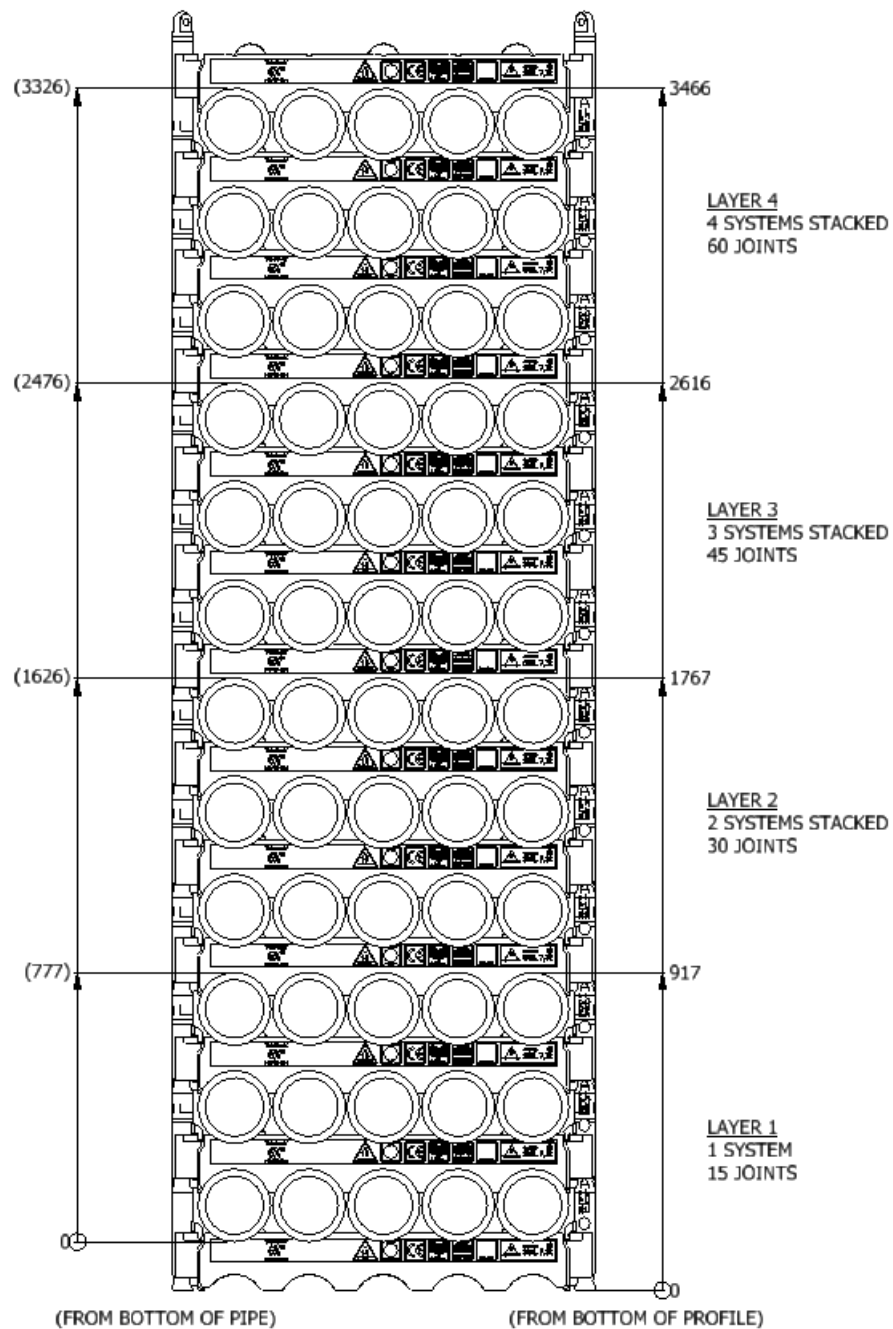

Spacing							
Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	1060	1140	0	80	$T_w = w + 2f$	95
Running on rig	$w = S_w + k \cdot (n - 1)$	1060	1180	40	120	$T_w = w + 2f$	95

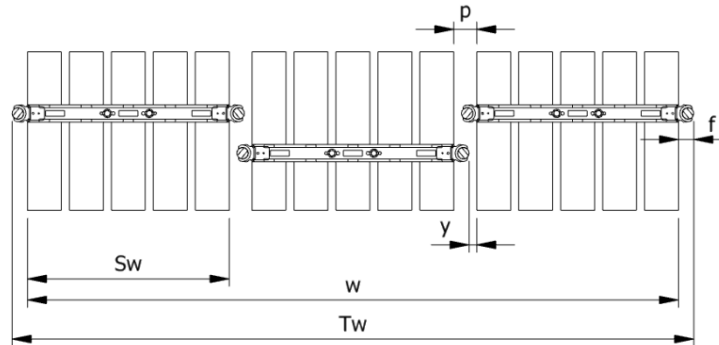

Example: Top view of Systems

Example:
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 1030 + 1125 \cdot (3 - 1) = 3280 \text{ mm}$$

$$T_w = w + 2f = 3280 + 2 \cdot 95 = 3470 \text{ mm}$$

The width “w” is the distance between the 2 outer most pipes
The total width “T_w” is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.
Each additional system stacked, will be added to the total footprint

	System Stacked	Footprint
	1	5 kN/m ²
	2	10 kN/m ²
	3	15 kN/m ²
	4	20 kN/m ²