
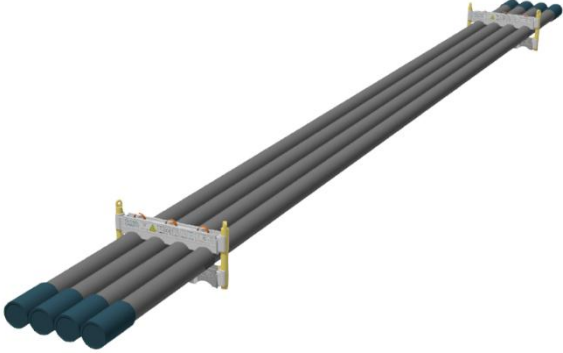


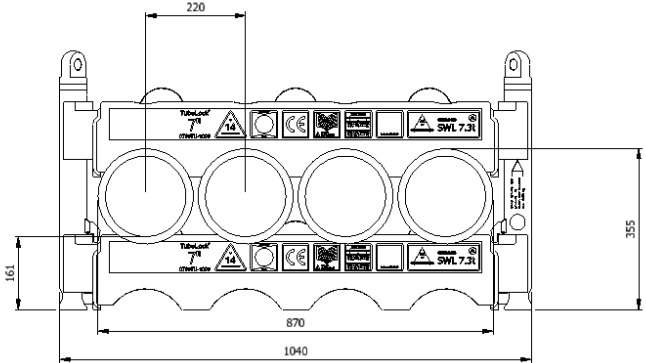


<h2>Data sheet</h2> <h3>0700TU-1000-1-A</h3>		
SWL	7.3 t	
Pipe OD	7"	
Maximum weight per pipe	1805kg	
Pipe capacity per system	4	
M20 Bolt length	260mm	
Lifting pole	LP - A	
H-Profile	0700TU-1000	
TL weight per system	79 kg	
<p>CODES AND STANDARDS</p> <ul style="list-style-type: none"> • DNVGL-ST-0378 • NORSOK R-002 • LOLER 1998 Lifting operation and lifting equipment regulations • ILO Conversation No. 152 • CE declaration of conformity • Machinery Directive: MD2006/42/EC 		
<p>TEST</p> <ul style="list-style-type: none"> • Load Test 2X SWL on 5% per batch • NDT 100% of Primary per batch before and after test 		
<p>H-Profile</p> 		<p>Lifting Pole</p> 


Stacking

Layer	Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	1	360	4		X	X	X	X
2	2	650	8		X	X	X	X
3	3	940	12		X	X	X	X
4	4	1230	16		X	X	X	X
5	5	1530	20		X	X	X	X
6	6	1820	24		X	X	X	X

(x): Depending on Truck set-up and regulation

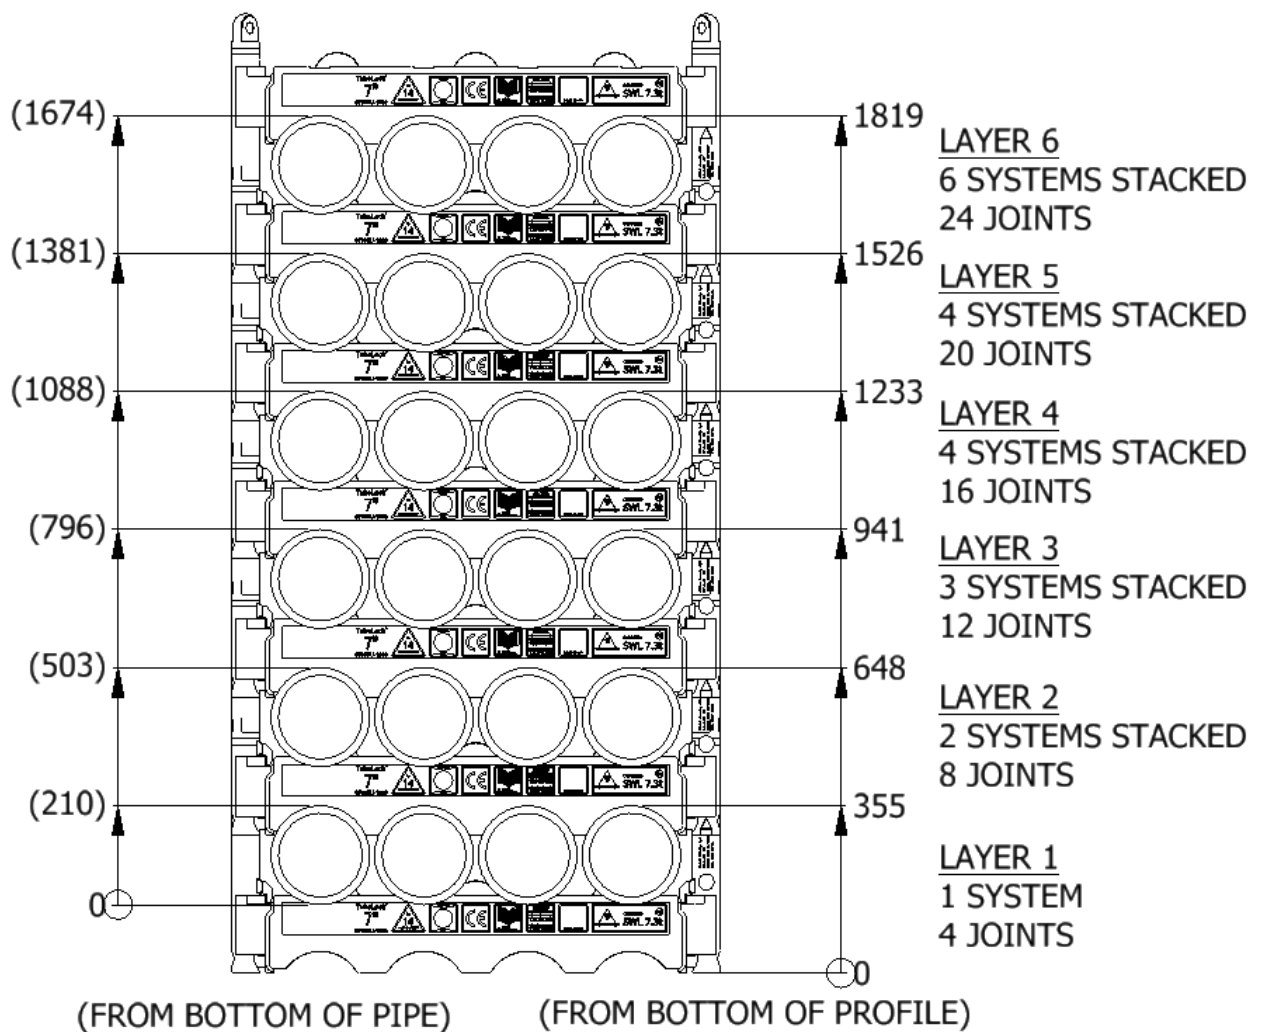

Spacing							
Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	w = S _w + k · (n - 1)	840	940	0	100	T _w = w + 2f	100
Running on rig	w = S _w + k · (n - 1)	840	980	40	140	T _w = w + 2f	100

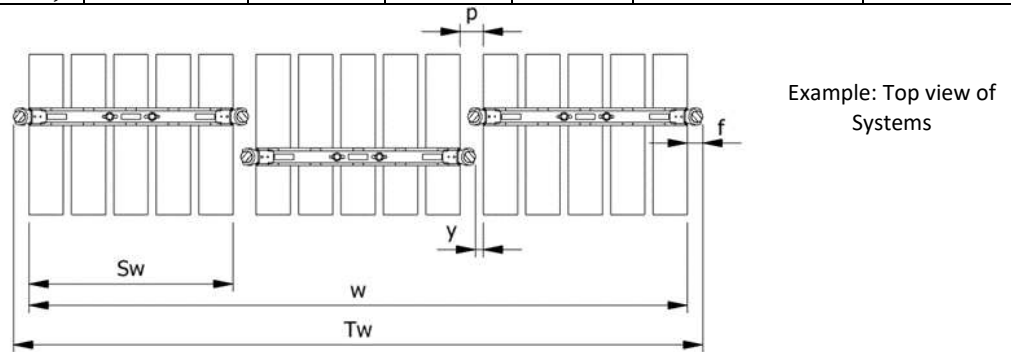

Example:
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 840 + 940 \cdot (3 - 1) = 2720\text{mm}$$

$$T_w = w + 2f = 2720 + 2 \cdot 100 = 2920\text{mm}$$

The width "w" is the distance between the 2 outer most pipes
The total width "T_w" is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.
Each additional system stacked, will be added to the total footprint.

	System Stacked	Footprint
	1	6 kN/m ²
	2	12 kN/m ²
	3	18 kN/m ²
	4	24 kN/m ²
	5	30 kN/m ²
6	36 kN/m ²	