





<h2 style="margin: 0;">Datasheet</h2> <h3 style="margin: 0;">0958-1000-2-F</h3>	
SWL	7.3 t
Pipe OD	9-5/8"
Maximum weight per pipe	1196 kg
Pipe capacity per system	6
M20 Bolt length	330mm
Lifting pole	LP - F
H-Profile	0958TU-1000
TL weight per system	124
<p>CODES AND STANDARDS</p> <ul style="list-style-type: none"> • DNVGL-ST-0378 • NORSOK R-002 • LOLER 1998 Lifting operation and lifting equipment regulations • ILO Conversation No. 152 • CE declaration of conformity • Machinery Directive: MD2006/42/EC 	
<p>TEST</p> <ul style="list-style-type: none"> • Load Test 2X SWL on 5% per batch • NDT 100% of Primary per batch before and after test 	
<p>H-Profile</p> 	<p>Lifting Pole</p> 




Stacking


Layer	Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	1	780	6		x	x	x	x
2	2	1500	12		x	x	x	x
3	3	2220	18		(x)		x	x
4	4	2940	24	x			x	x
5	5	3650	30	x			x	x

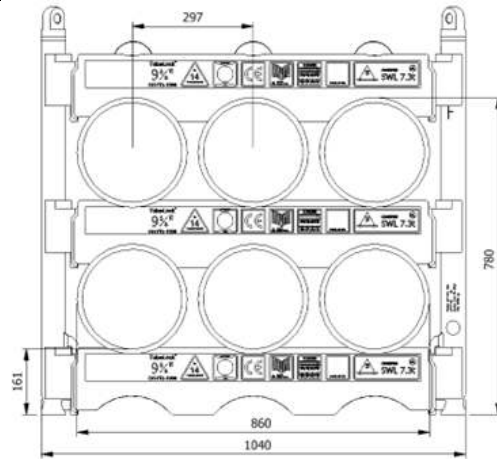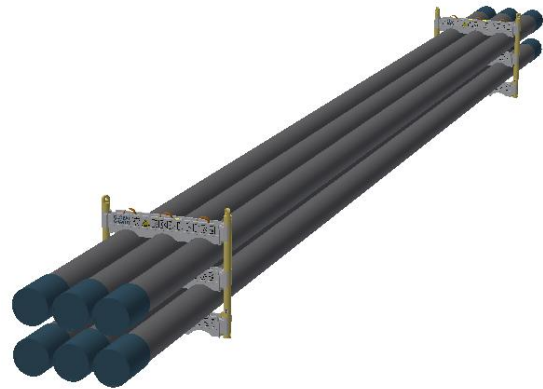(x): Depending on Truck set-up and regulation

All sketch dimensions in mm

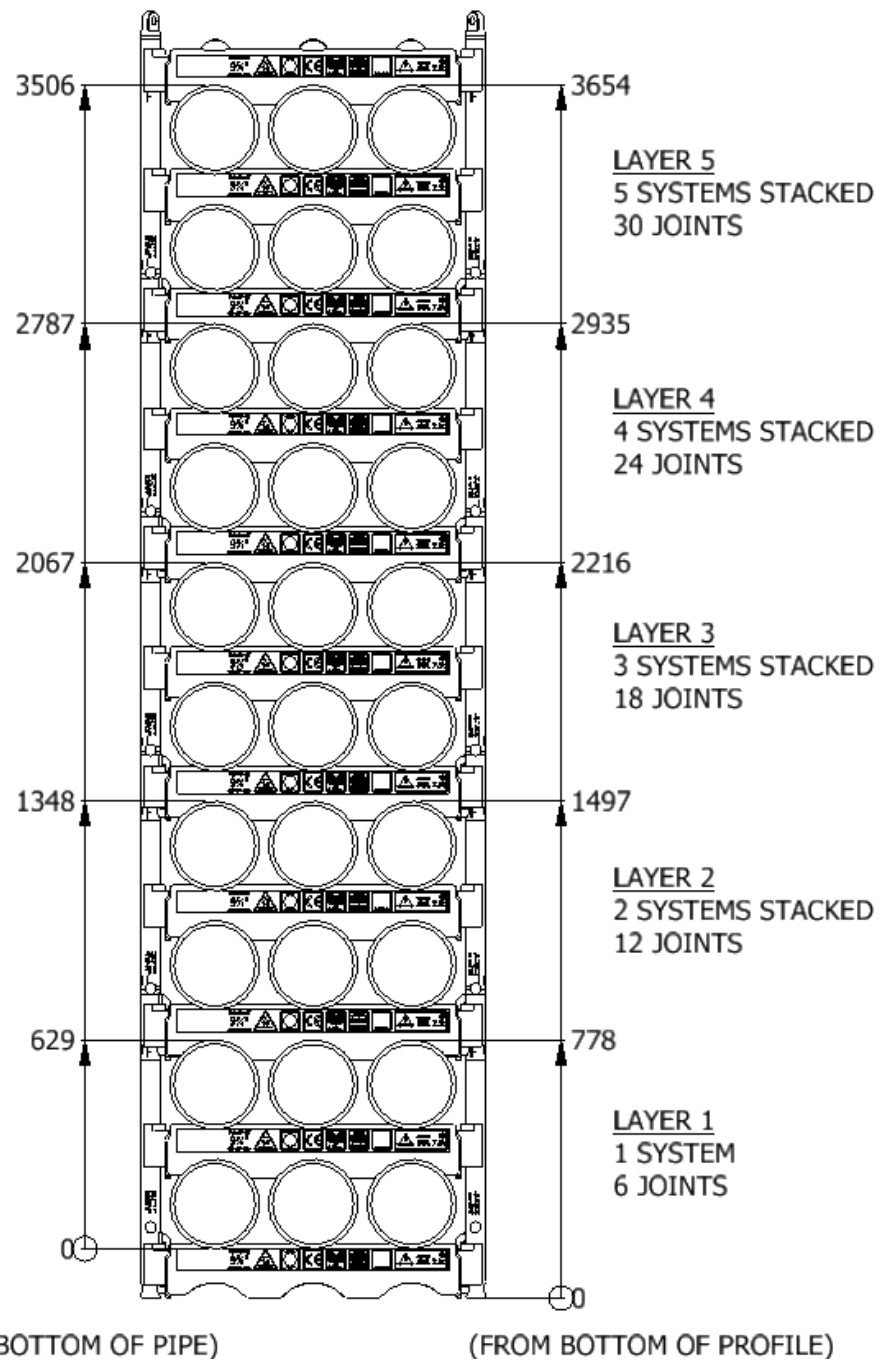

Spacing							
Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	890	960	0	70	$T_w = w + 2f$	70
Running on rig	$w = S_w + k \cdot (n - 1)$	890	1000	40	111	$T_w = w + 2f$	70

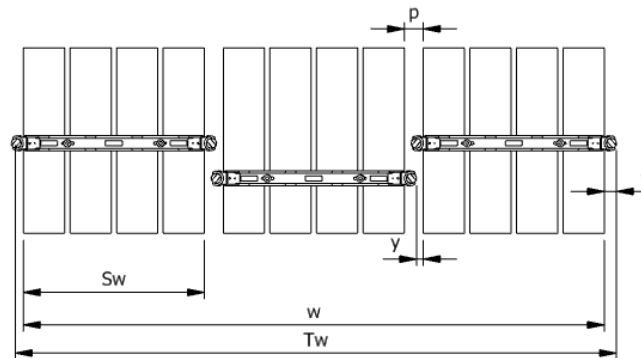

Example: Top view of Systems

Example:
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 1074 + 1146 \cdot (3 - 1) = 2810\text{mm}$$

$$T_w = w + 2f = 2810 + 2 \cdot 70 = 2950\text{mm}$$

The width "w" is the distance between the 2 outer most pipes
The total width "T_w" is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.
Each additional system stacked, will be added to the total footprint.

	System Stacked	Footprint
	1	6 kN/m ²
	2	12 kN/m ²
	3	18 kN/m ²
	4	24 kN/m ²
	5	30 kN/m ²