
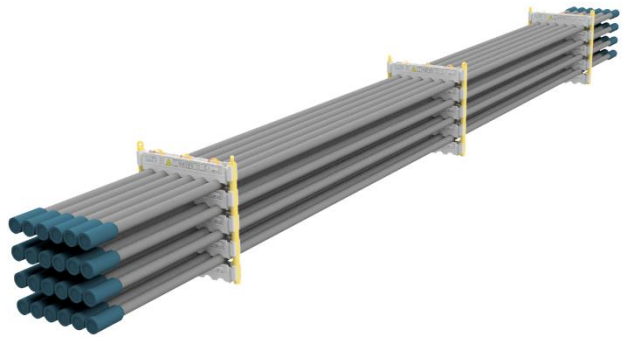


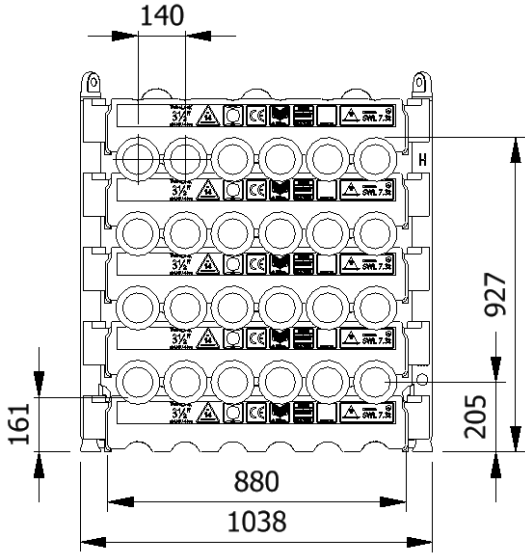


Data sheet 0350TU-1000-4-H	
SWL	7,3 t
Pipe OD	3-1/2"
Maximum weight per pipe	292kg
Pipe capacity per system	24
M20 Bolt length	190mm
Lifting pole	LP - H
H-Profile	0350TU-1000
TL weight per system	275 kg
CODES AND STANDARDS <ul style="list-style-type: none"> DNVGL-ST-0378 NORSOK R-002 LOLER 1998 Lifting operation and lifting equipment regulations ILO Conversation No. 152 CE declaration of conformity Machinery Directive: MD2006/42/EC 	
TEST <ul style="list-style-type: none"> Load Test 2X SWL on 5% per batch NDT 100% of Primary per batch before and after test 	
	
	
H-Profile 	Lifting Pole 

Stacking


Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	927	24		X	X	X	X
2	1803	48		X	X	X	X
3	2678	72	X			X	X
4	3554	96	X			X	X

(x): Depending on Truck set-up and regulation

All sketch dimensions in mm

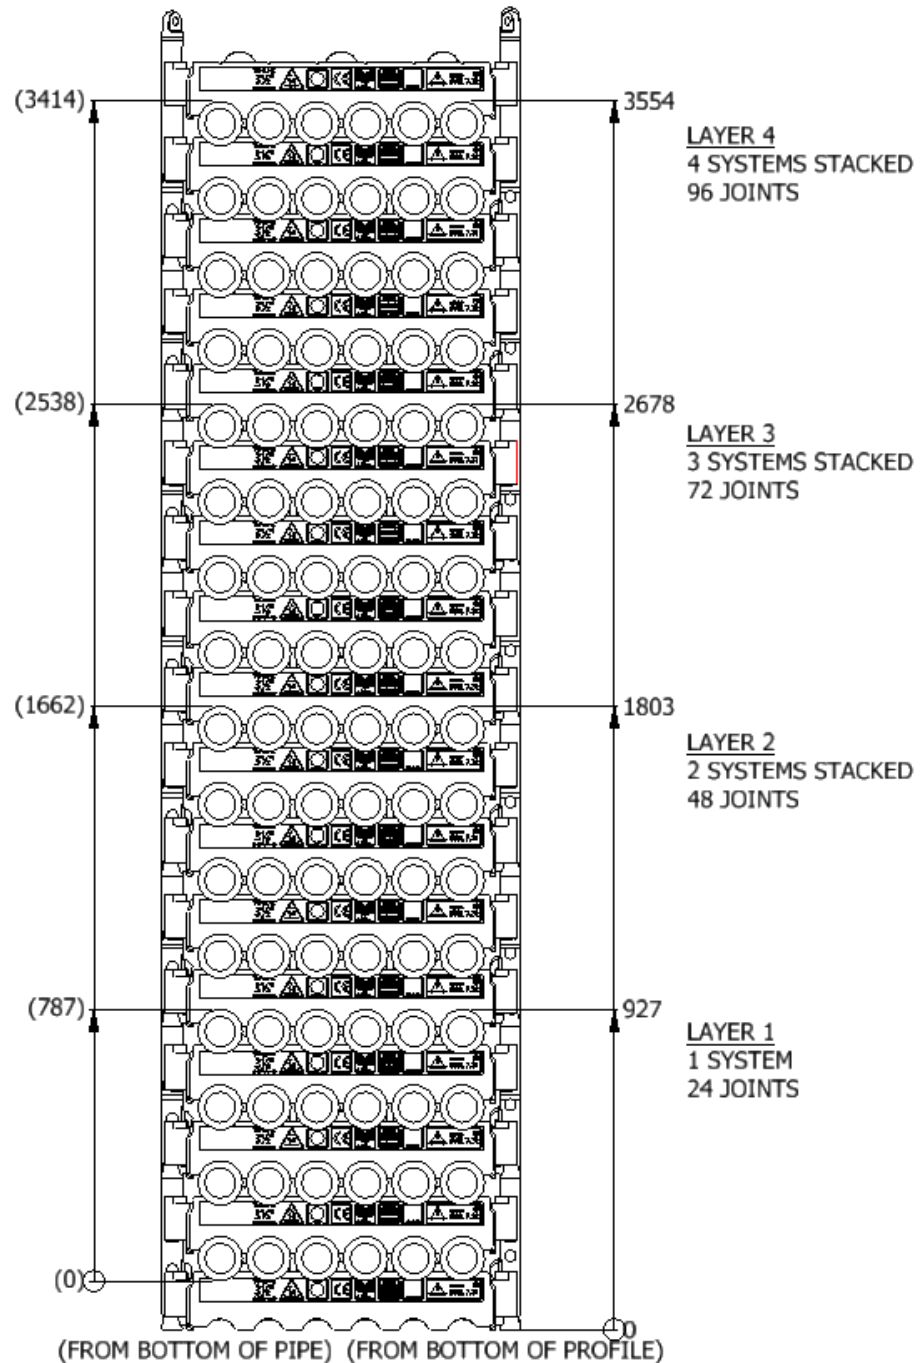

Spacing							
Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	790	915	0	125	$T_w = w + 2f$	125
Running on rig	$w = S_w + k \cdot (n - 1)$	790	955	40	165	$T_w = w + 2f$	125

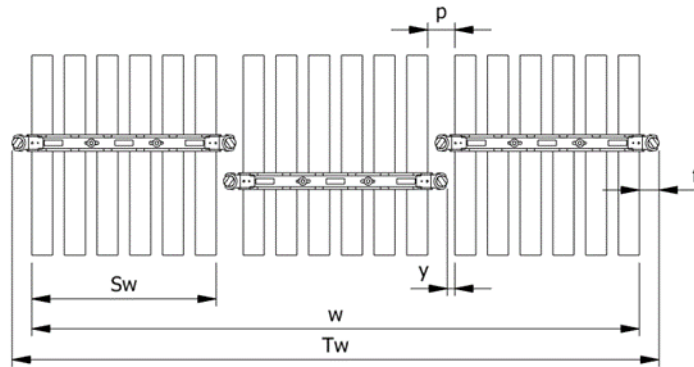

Topview of systems

Example:

Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 790 + 915 \cdot (3 - 1) = 2620\text{mm}$$

$$T_w = w + 2f = 2620 + 2 \cdot 125 = 2870\text{mm}$$


The width “w” is the distance between the 2 outer most pipes

The total width “T_w” is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.

Each additional system stacked, will be added to the total footprint.

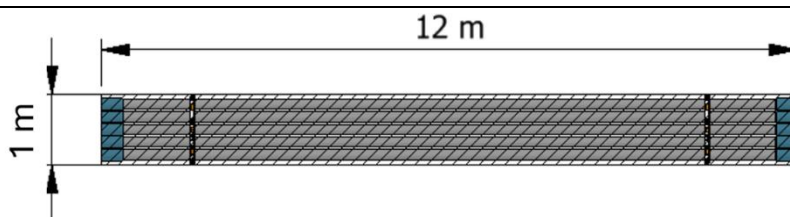

System Stacked	Footprint
1	6 kN/m ²
2	12 kN/m ²
3	18 kN/m ²
4	24 kN/m ²