
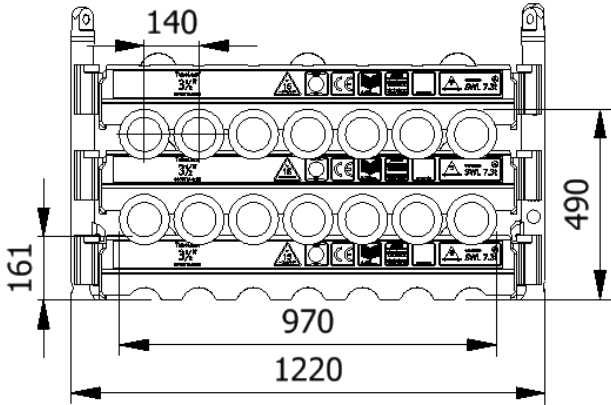





<h2>Data sheet</h2> <h3>0350TU-1200-2-C</h3>	
SWL	7,3 t
Pipe OD	3-1/2"
Maximum weight per pipe	508kg
Pipe capacity per system	14
M20 Bolt length	190mm
Lifting pole	LP - C
H-Profile	0350TU-1200
TL weight per system	183 kg
<p>CODES AND STANDARDS</p> <ul style="list-style-type: none"> • DNVGL-ST-0378 • NORSOK R-002 • LOLER 1998 Lifting operation and lifting equipment regulations • ILO Conversation No. 152 • CE declaration of conformity • Machinery Directive: MD2006/42/EC 	
<p>TEST</p> <ul style="list-style-type: none"> • Load Test 2X SWL on 5% per batch • NDT 100% of Primary per batch before and after test 	
	
	
<p>H-Profile</p> 	
<p>Lifting Pole</p> 	

Stacking


Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	489	14		x	x	x	x
2	927	28		x	x	x	x
3	1365	42		x	x	x	x
4	1803	56		x	x	x	x
5	2241	70		(x)		x	x
6	2678	84	x			x	x

(x): Depending on Truck set-up and regulation

All sketch dimensions in mm

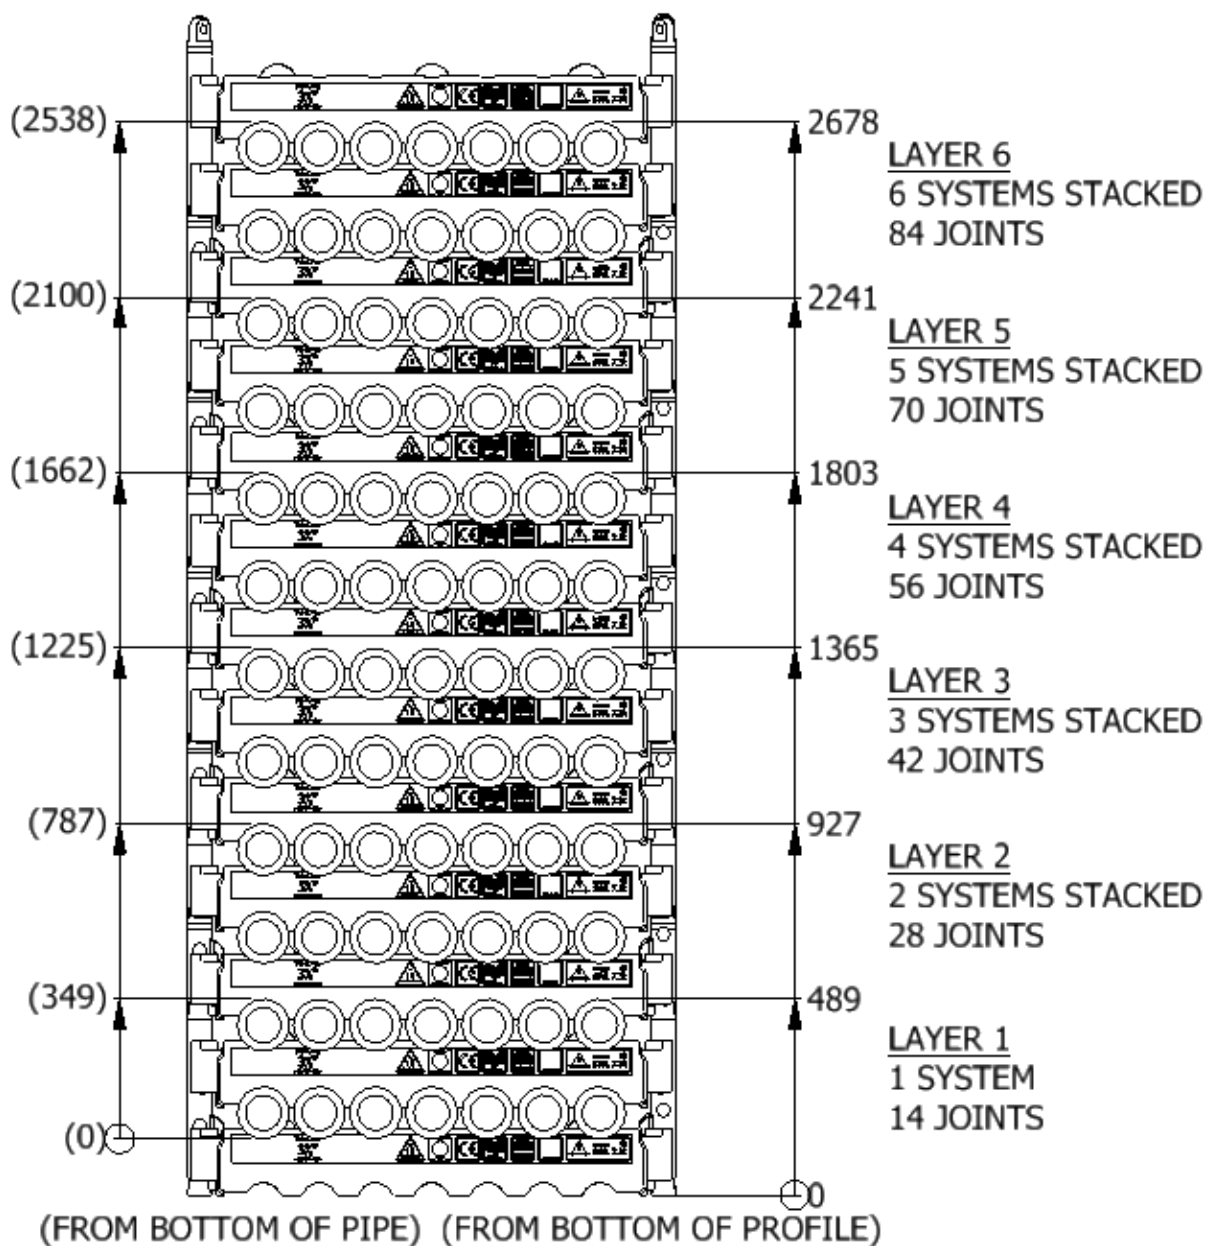

Spacing							
Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	930	1075	0	145	$T_w = w + 2f$	145
Running on rig	$w = S_w + k \cdot (n - 1)$	930	1115	40	185	$T_w = w + 2f$	145

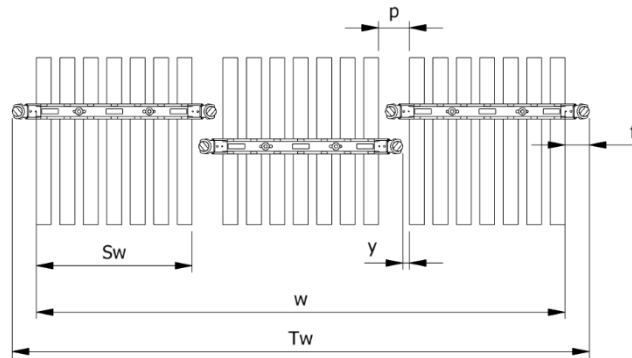

Topview of systems

Example:

Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 930 + 1115 \cdot (3 - 1) = 3160\text{mm}$$

$$T_w = w + 2f = 3160 + 2 \cdot 145 = 3450\text{mm}$$


The width “w” is the distance between the 2 outer most pipes

The total width “T_w” is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.

Each additional system stacked, will be added to the total footprint.

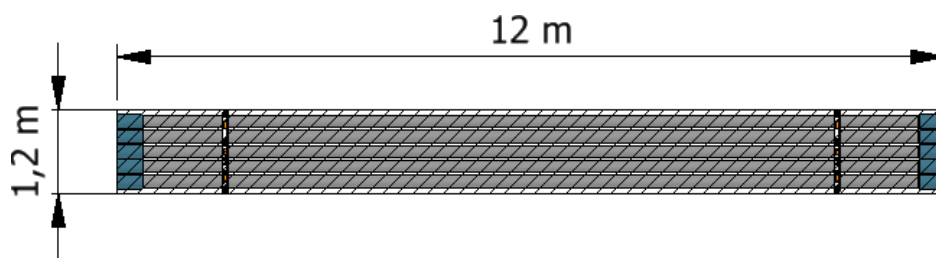

System Stacked	Footprint
1	5 kN/m ²
2	10 kN/m ²
3	15 kN/m ²
4	20 kN/m ²
5	25 kN/m ²
6	30 kN/m ²