


Data sheet 0278TU-1200-4-G

SWL	7,3 t
Pipe OD	2-7/8"
Maximum weight per pipe	195 kg
Pipe capacity per system	36
M20 Bolt length	170mm
Lifting pole	G
H-Profile	0278-1200
TL weight per system	298 kg

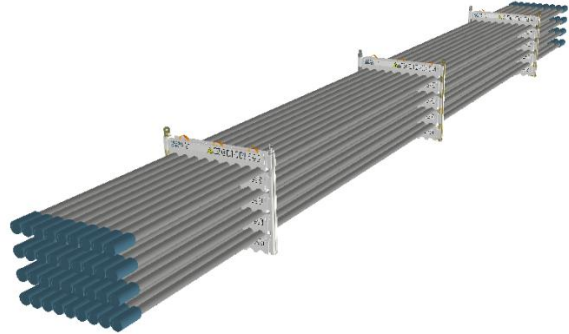


CODES AND STANDARDS

- DNV-ST-0378
- NORSOK R-002
- LOLER 1998 Lifting operation and lifting equipment regulations
- ILO Conversation No. 152
- CE declaration of conformity
- Machinery Directive: MD2006/42/EC

TEST

- Load Test 2X SWL on 5% per batch
- NDT 100% of Primary per batch before and after test

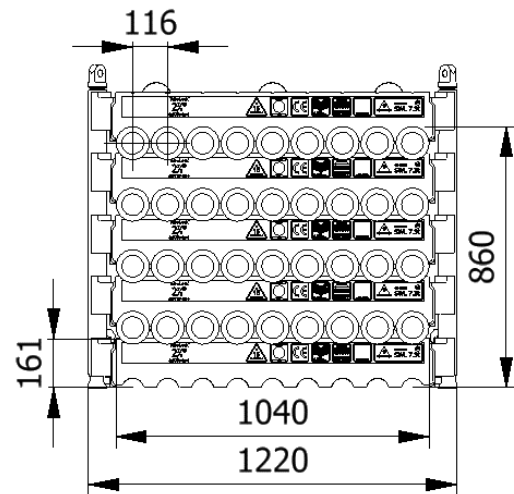

H-Profile



Lifting Pole




Stacking


Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
867	36		x	x	x	X
1682	72		x	x	x	X
2497	108		(x)		x	x
3312	144	x			x	x

(x): Depending on Truck set-up and regulation

All sketch dimensions in mm

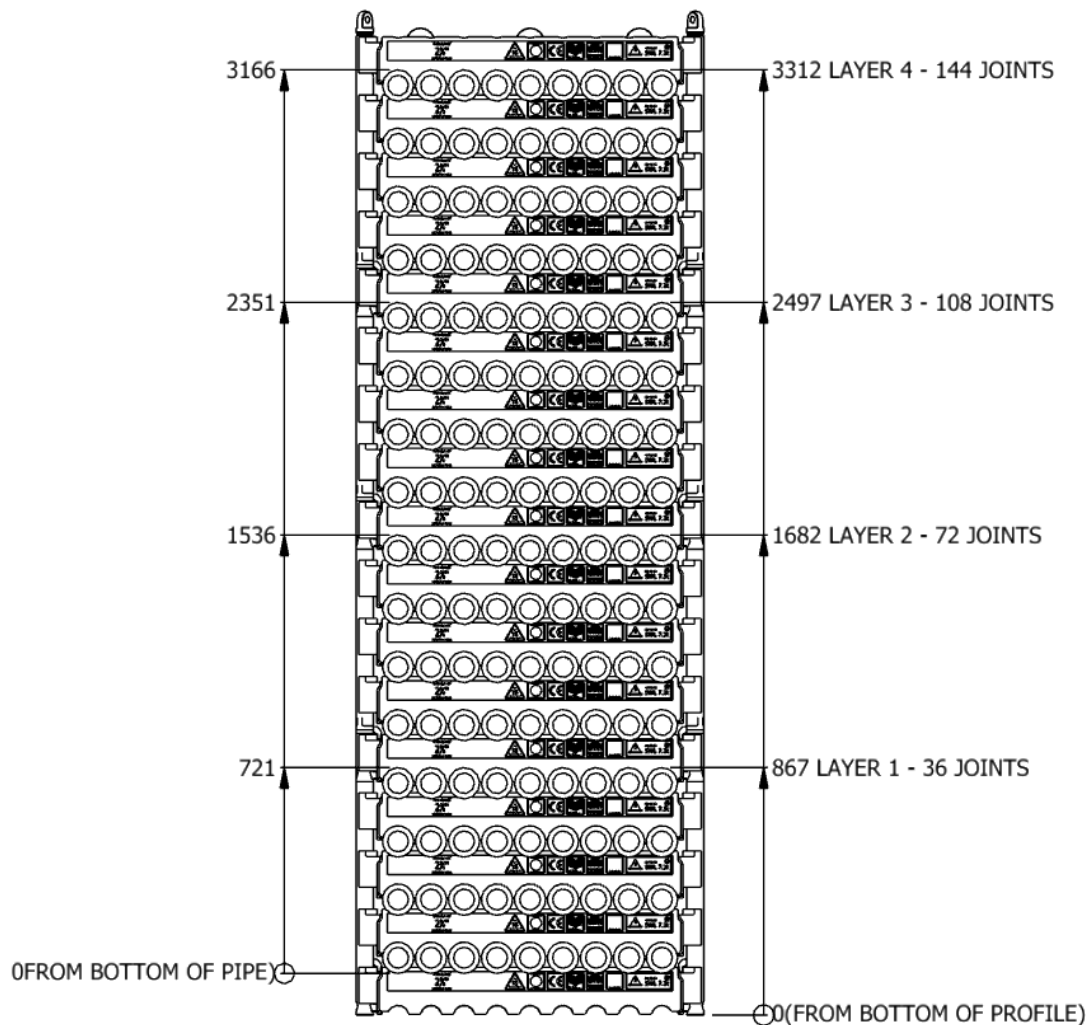

Spacing							
Status	w (width) n (number of rows)	S_w (system width)	k (constant)	y (info)	p (info)	T_w (total width)	f (constant)
Storages	$w = S_w + k \cdot (n - 1)$	1000	1110	0	110	$T_w = w + 2f$	110
Running on rig	$w = S_w + k \cdot (n - 1)$	1000	1150	40	150	$T_w = w + 2f$	110

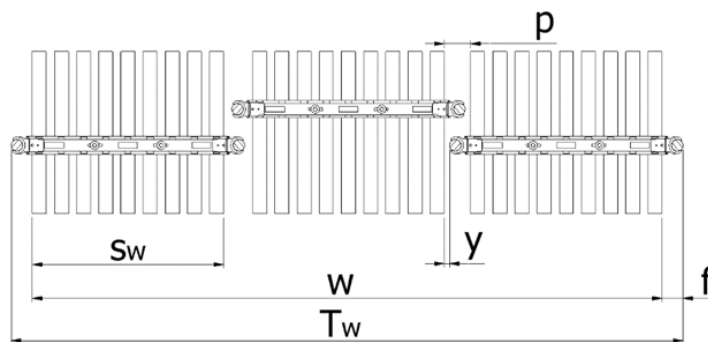

Example: Top view of Systems

Example:
Spacing of 3 systems


$$w = S_w + k \cdot (n - 1) = 1000 + 1110 \cdot (3 - 1) = 3220\text{mm}$$

$$T_w = w + 2f = 3220 + 2 \cdot 110 = 3440\text{mm}$$

The width “w” for spacing of systems is 3220mm from the first pipe to the last and the total width “ T_w ” is 3440mm between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system. Each additional system stacked, will be added to the total footprint.

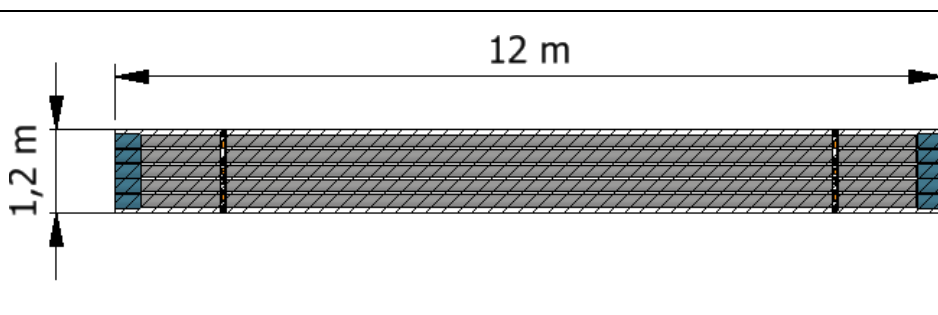	System Stacked	Footprint
	1	5 kN/m ²
	2	10 kN/m ²
	3	15 kN/m ²
	4	20 kN/m ²
	5	25 kN/m ²
	6	30 kN/m ²