


Data sheet 0300TU-1200-3-E

SWL	7,3 t
Pipe OD	3"
Maximum weight per pipe	260kg
Pipe capacity per system	27
M20 Bolt length	170mm
Lifting pole	LP - GE
H-Profile	0300TU-1200
TL weight per system	254 kg

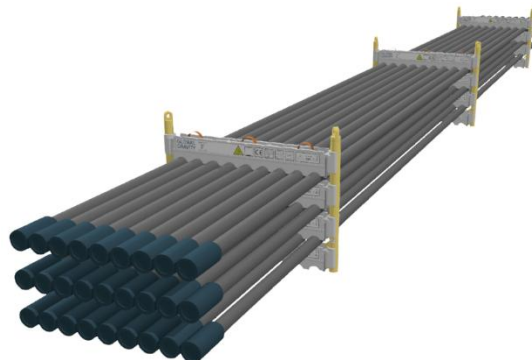


CODES AND STANDARDS

- DNVGL-ST-0378
- NORSOK R-002
- LOLER 1998 Lifting operation and lifting equipment regulations
- ILO Conversation No. 152
- CE declaration of conformity
- Machinery Directive: MD2006/42/EC

TEST

- Load Test 2X SWL on 5% per batch
- NDT 100% of Primary per batch before and after test

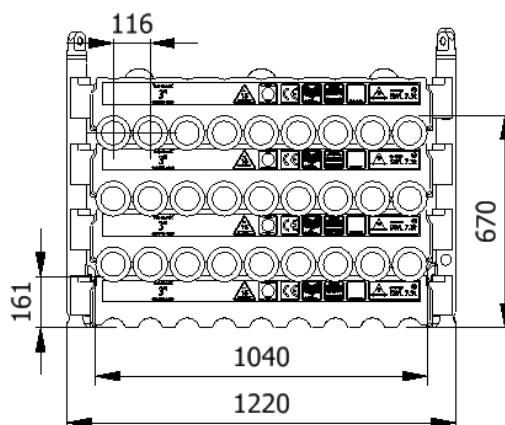

H-Profile




Lifting Pole



Stacking


Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	667	27		X	X	X	X
2	1285	54		X	X	X	X
3	1904	81		X	X	X	X
4	2522	108	x			X	X
5	3141	135	x			X	X
6	3760	162	x			X	X

(x): Depending on Truck set-up and regulation

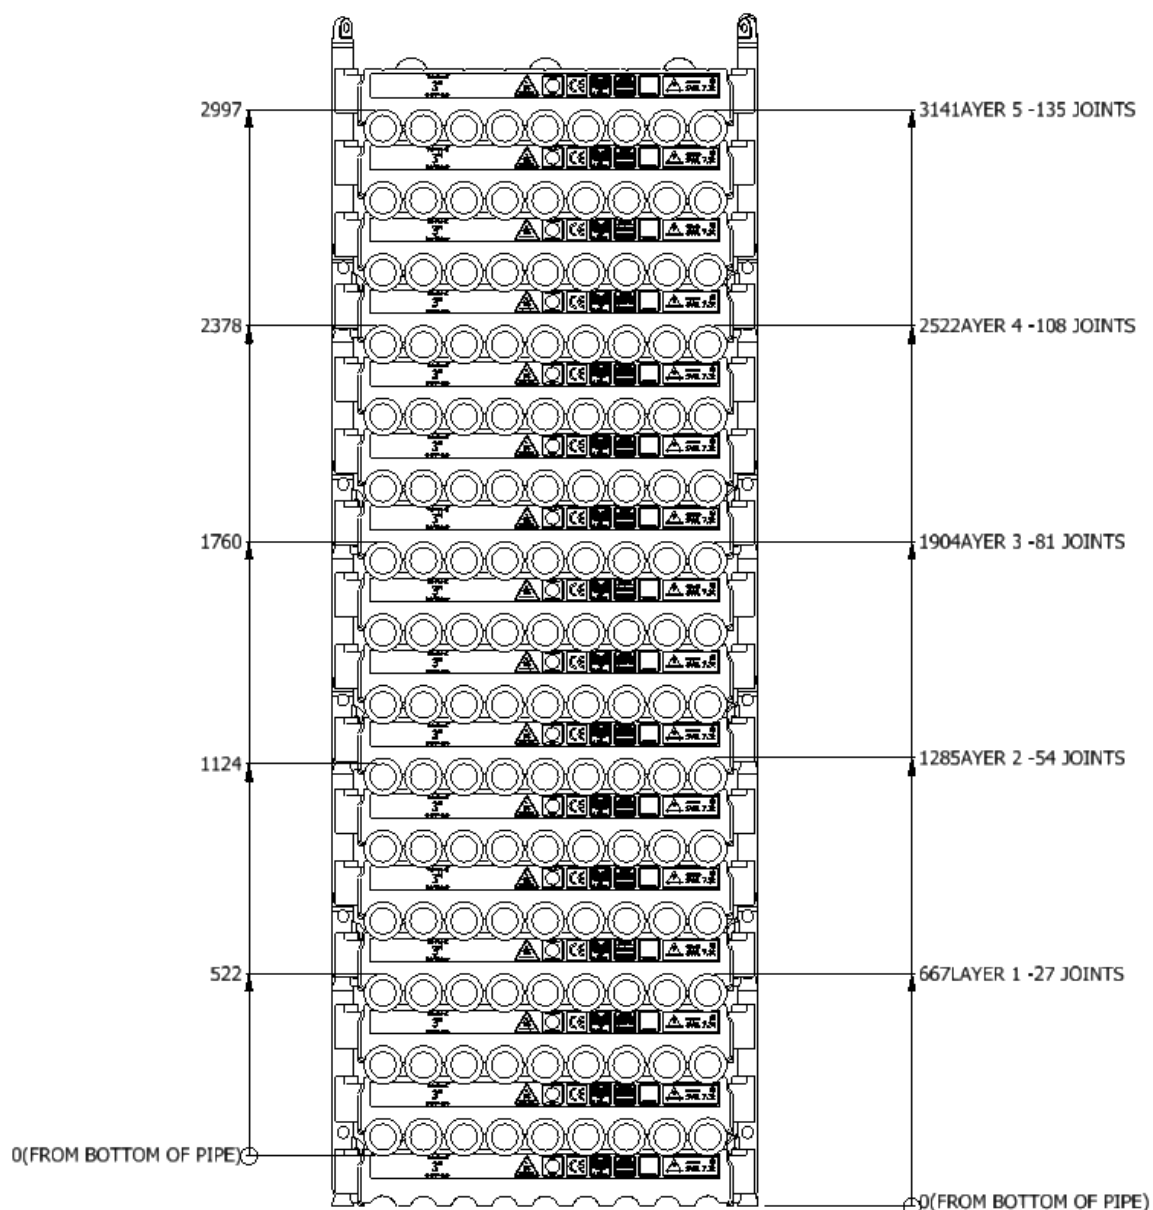

Spacing

Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	1007	1113	0	106	$T_w = w + 2f$	106
Running on rig	$w = S_w + k \cdot (n - 1)$	1007	1153	40	146	$T_w = w + 2f$	106

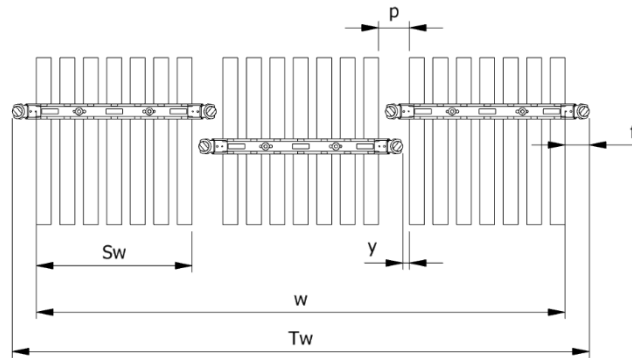

Topview of systems

Example:
Spacing of 3 systems


$$w = S_w + k \cdot (n - 1) = 1007 + 1153 \cdot (3 - 1) = 3445 \text{ mm}$$

$$T_w = w + 2f = 3445 + 2 \cdot 106 = 3525 \text{ mm}$$

The width “w” is the distance between the 2 outer most pipes
The total width “T_w” is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.
Each additional system stacked, will be added to the total footprint.

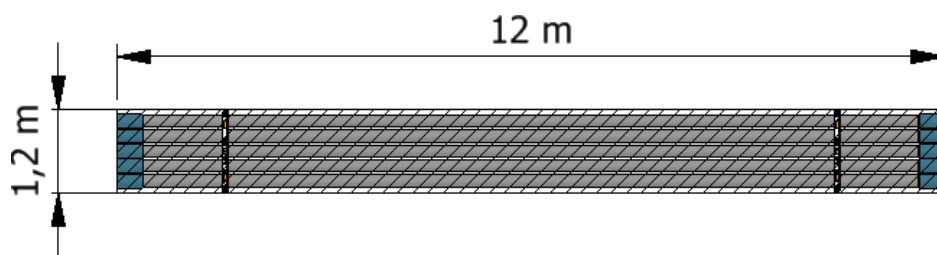

System Stacked	Footprint
1	5 kN/m ²
2	10 kN/m ²
3	15 kN/m ²
4	20 kN/m ²
5	25 kN/m ²
6	30 kN/m ²