


Datasheet 0450TU-1200-2-C

SWL	7,3 t
Pipe OD	4-1/2"
Maximum weight per pipe	593kg
Pipe capacity per system	12
M20 Bolt length	200mm
Lifting pole	LP - C
H-Profile	0450TU-1200
TL weight per system	184 kg

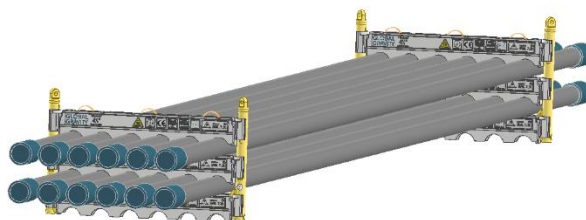


CODES AND STANDARDS

- DNVGL-ST-0378
- NORSOK R-002
- LOLER 1998 Lifting operation and lifting equipment regulations
- ILO Conversation No. 152
- CE declaration of conformity
- Machinery Directive: MD2006/42/EC

TEST

- Load Test 2X SWL on 5% per batch
- NDT 100% of Primary per batch before and after test

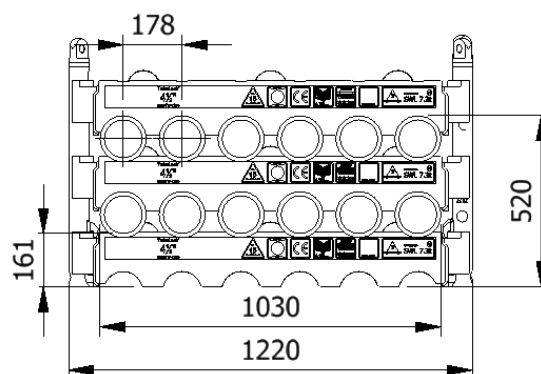

H-Profile



Lifting Pole




Stacking

Systems Stacked	Height (mm)	Joints	Supported	Truck	Boat	Rig	Yard
1	517	12		x	x	x	x
2	972	24		x	x	x	x
3	1426	36		x	x	x	x
4	1880	48		x	x	x	x
5	2335	60		(x)		x	x
6	2789	72	x			x	x


(x): Depending on Truck set-up and regulation

All sketch dimensions in mm

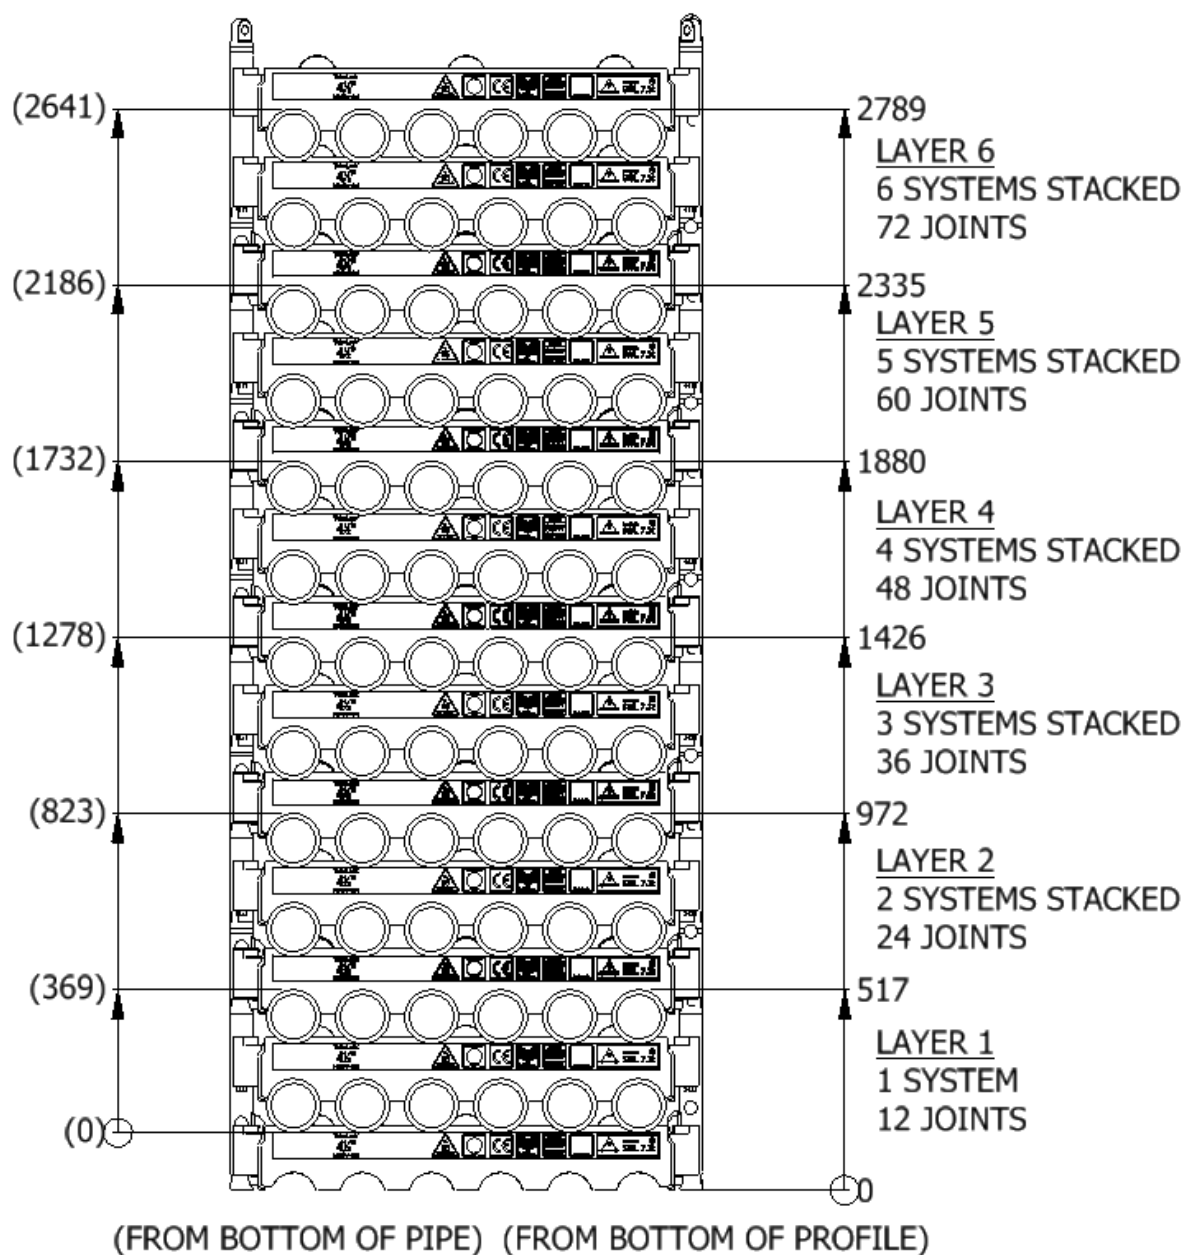

Spacing

Status	w (width) n (number of rows)	S _w (system width)	k(constant)	y(info)	p(info)	T _w (total width)	f(constant)
Storages	$w = S_w + k \cdot (n - 1)$	1000	1110	0	110	$T_w = w + 2f$	110
Running on rig	$w = S_w + k \cdot (n - 1)$	1000	1150	40	150	$T_w = w + 2f$	110

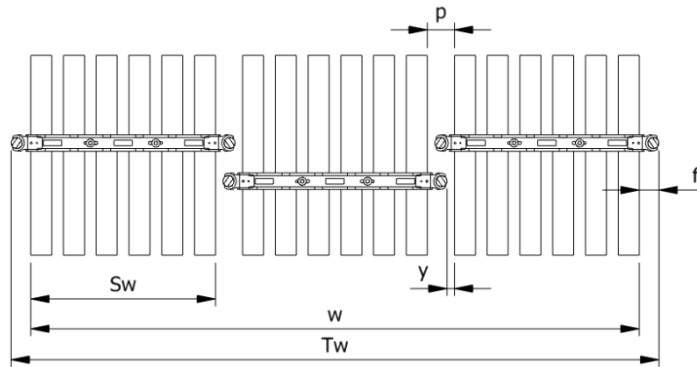

Example: Top view of Systems

Example:
Spacing of 3 systems

$$w = S_w + k \cdot (n - 1) = 1000 + 1110 \cdot (3 - 1) = 3220 \text{ mm}$$

$$T_w = w + 2f = 3220 + 2 \cdot 110 = 3440 \text{ mm}$$

The width “w” is the distance between the 2 outer most pipes
The total width “T_w” is between the 2 outer most Lifting Poles

Footprint

The figure below shows the footprint surface area of a TubeLock® system.
Each additional system stacked, will be added to the total footprint.

	System Stacked	Footprint
	1	5 kN/m ²
	2	10 kN/m ²
	3	15 kN/m ²
	4	20 kN/m ²
	5	25 kN/m ²
	6	30 kN/m ²